



RT-65 Compact Track Loader



RT-65 Brief Specifications

Operating weight:	7,630 lbs 3,461 kg
Tipping load:	5,500 lbs 2,495 kg
Ground pressure:	4.3 psi 29.7 kPa
Gross engine power	67 hp 50 kW

SPECIFICATIONS

RT-65

OPERATING SPECIFICATIONS

Loader arms	Radial
Operating weight	7630 lbs 3461 kg
Shipping weight	6938 lbs 3147 kg
Ground pressure @ operating weight	4.3 psi 29.7 kPa
Rated operating capacity, 35% of tipping load	1925 lbs 873 kg
Operating capacity, 50% of tipping load	2250 lbs 1247 kg
Tipping load	5500 lbs 2495 kg
Travel speed, maximum	10.6 mph 17.1 kph
Attachments	Variable

ENGINE

Type	Diesel, 3-cylinder, turbocharged, after-cooled
Model	Deutz TCD 2.2 T4
Displacement	134 in ³ 2.2 L
Gross power rating @ 2800 rpm	67 hp 50 kW
Torque, peak	184.4 ft-lb 250 Nm
Cooling system	Engine-driven fan and coolant/ anti-freeze-filled radiator
Intake air cleaner	Dual stage
Emission controls	Meets all U.S. EPA Tier 4 final standards

UNDERCARRIAGE

Track type	General purpose track constructed of rubber compound with embedded co-polymer cords and all-purpose treads. Single row of track drive lugs molded in. Turf track with smooth tread available as an option.
Track width	15 in 381 mm
Length of track on ground	59 in 1499 mm
Ground contact area	1770 in ² 1.14 m ²
Drive system	Two hydrostatic direct drive sprockets controlled by a single joystick
Track drive sprocket	Elevated with low friction, replaceable sprocket rollers
Undercarriage suspension	Two independent torsion axles per undercarriage
Roller wheels	12 high-density polyurethane and rubber wheels per track Wheels include sealed bearings
Roller wheel diameter:	
Front wheels	14 in 365 mm
Other wheels	10 in 254 mm

AUX. HYDRAULIC SYSTEM

Pump capacity	27.4 gpm 103.7 lpm
System pressure, max.	3300 psi 22753 kPa
Controls	Pilot Hydraulic Joystick Control (LH = speed/direction, RH = loader), Work Port Relief
Couplers	Push-to-connect quick couplers mounted on loader arms Pressure relief valve mounted to coupler block
Cooling system	High-efficiency hydraulic oil cooler beside (not stacked) engine radiator

ELECTRICAL SYSTEM

Nominal charge	12 V
Battery	800 CCA
Charging system	120 amp alternator
Outlets	1-12 V port inside operator station
Wiring	Pre-wired for all factory-available accessories



OPERATOR STATION

Seat: Adjustable contour vinyl with built-in operator presence switch, lap bar and 2 in 51 mm wide seat belt	
Loader control: Right-hand pilot hydraulic joystick controls loader lift/lower and tilt, plus intermittent control of auxiliary hydraulic	
Drive control: Left-hand pilot hydraulic joystick controls machine speed and direction	
Engine speed	Foot pedal & hand-operated throttle lever
Multifunctional display	Fuel, Tachometer, Trip Meter, Battery Engine Temperature, Hour Meter, Hydraulic Temperature, Water Temperature, Multiple Languages
ROPS	Meets SAE J1040 MAY94, ISO 3471
FOPS	Meets SAE J1043 SEPT87, ISO 3449
Illumination	2 - Fixed forward-facing halogen lights 2 - Adjustable rear-facing halogen lights 1 - Interior light
Convenience	12 V power port
Horn	
Backup alarm	

* Machine tested with foundry bucket

DIMENSIONS

RT-65

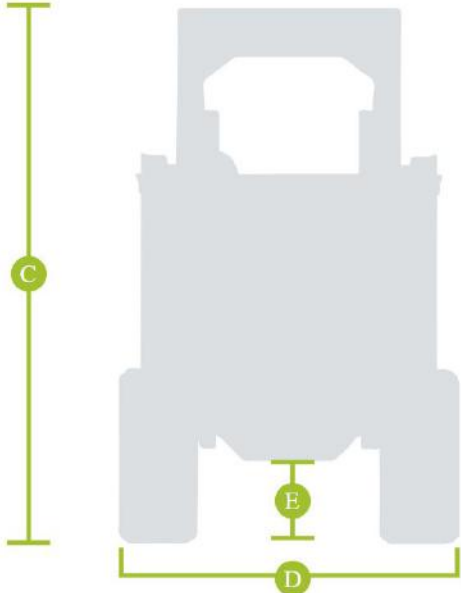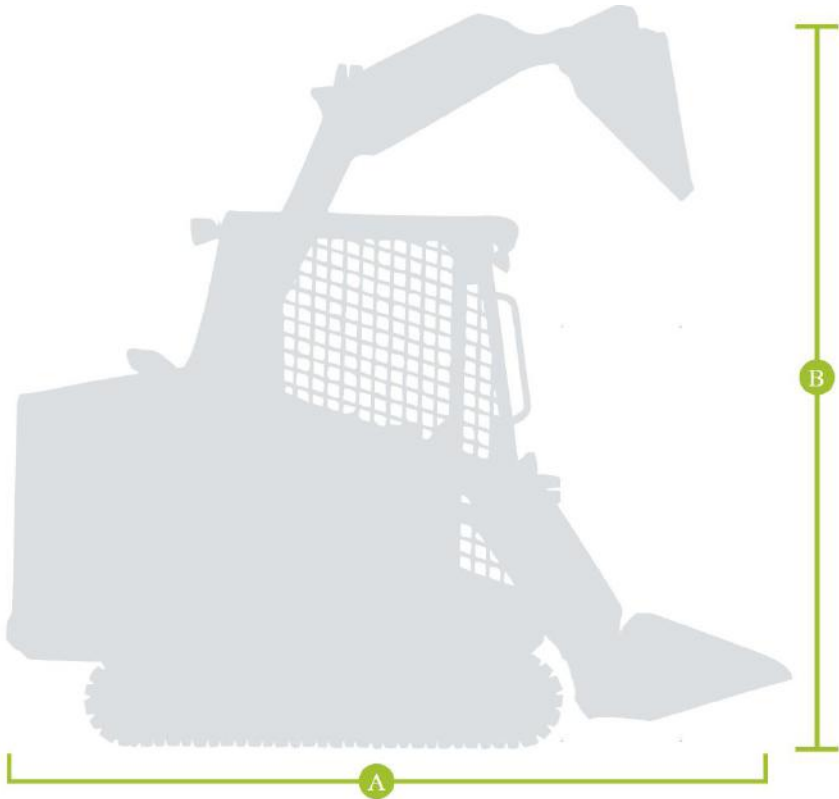

- A. Full Length: 141.5 in. | 3594 mm
- B. Arm-Up Height: 116.5 in. | 2959 mm
- C. Machine Height: 81.4 in. | 2067 mm
- D. Width: 66 in. | 1676 mm
- E. Ground Clearance: 13 in. | 330 mm

SPECIFICATIONS

RT-65

SERVICE REFILL CAPACITIES

Fuel tank	23.2 gal 87.8 L
Hydraulic tank	3.3 gal 12.5 L
Engine coolant/antifreeze	2.5 gal 9.5 L
Engine oil, including filter	8.5 quarts 8.0 L

OPTIONAL ATTACHMENTS

Auger drive and bits	Grapple bucket
Backhoe	Pallet forks
Broom, rotary	Power box rake
Bucket, general purpose	Snow blade
Bucket, light material	Snow blower
Bucket, multi-purpose	Stump grinder
Brush cutter, rotary	Trencher
Dozer blade	Vibratory roller
Eliminator rake	



Effective Date: AUGUST 2019

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and ASV makes no other warranty, express or implied. © 2016, ASV LLC. ASV, the ASV logo design and Positrack are trademarks of ASV, LLC.

ASV, LLC

840 Lily Lane
Grand Rapids, MN
55744-4089

Toll-free: (800) 205-9913
Fax: (218) 327-2297
www.asvllc.com

